

Superlux[®]



HD661

Professional Studio Standard Monitoring Headphones



Type	Dynamic, closed-back
Driver	Ø40 mm, neodymium
Sensitivity	102 dB SPL (1 mW)
Frequency Response	10-20,000 Hz
Max. Input Power	200 mW
Rated Impedance	68 Ω (Copper-coated aluminum wire)
Ear Pads	Leatherette
Cables	1-meter (3.3 ft.) & 3-meter (9.8ft.) straight, single-sided; plugin cable on headphones (mini stereo connector)
Connector	Gold plated stereo mini plug
Headphone Caliper Pressure	Approx. 4.5 N
Net Weight (without cable)	190 g (6.7 oz)
Accessories Furnished	Soft carrying pouch 1-meter (3') straight cable 3-meter (9.8') straight cable 3.5 mm to 6.3 mm (1/8" to 1/4") gold-plated stereo adapter Cable clip
Optional Accessories	EPK604 Ear pad kit (includes a pair of ear pads) FD3YW/S 3-meter (9.8') coiled cable HA3D headphone amplifier



The HD661 is a closed-back, circumaural headphone designed for professional monitoring applications in studio, on stage and in broadcast. Although suitable for a very wide range of applications, the exceptional attenuation of external noise of the HD 661 makes it particularly useful for use in a high noise environment. The balanced, high definition and clear sound of the HD661 assures that a professional sound engineer can have full confidence when recording or monitoring. Its patented sturdy headband structure provides long-lasting durability even in challenging conditions, yet its light weight and optimized mechanical pressure provides long-term wearing comfort.

- Dynamic, closed-back circumaural headphones
- High noise attenuation
- Ø40 mm high resolution drivers
- Precision tuned acoustic chamber
- Patented self-adjusting headband for great fit and maximum comfort
- Rotating ear pad construction for convenient single-ear monitoring
- Detachable, single side cable
- Light weight

www.superlux.com.tw

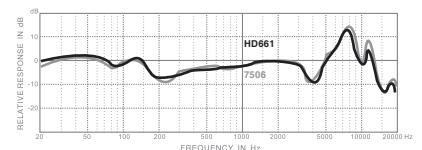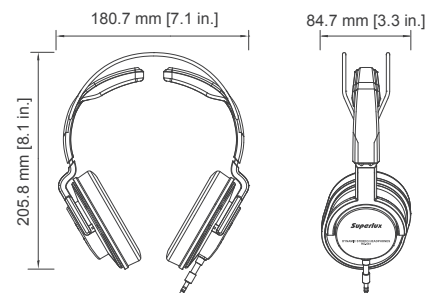

Both the HD661 and MDR-7506 have a similar frequency curve. The HD661 delivers a wide dynamic range and high resolution sound, presenting the crystal clear audio details demanded by professional users.

Superlux® 舒伯樂





HD661

專業錄音棚標準監聽級耳機

HD661是一支專業監聽等級封閉式耳機，可應用於專業錄音棚、現場演出及廣播等，其封閉隔音效果極佳，縱使在高噪音的環境或是戶外現場錄音都非常適用。其平衡而保真，清晰不漏細節的聲音表現，協助專業音響工程師在監聽時找出聲音的問題點。另外，專利自動調整的頭墊結構，柔軟的耳罩，提供良好的舒適性。

- 動圈、封閉式耳機
- 高隔離噪音效果
- Ø40 mm高解析驅動單元
- 精密調整聲學腔體
- 專利自動調整頭墊
- 可分離的單邊直導線
- 輕量化設計
- 可內外翻動耳罩結構，易於作單耳監聽

規格	動圈、封閉式
型式	Ø40 mm 鈹鐵
驅動單元	102 dB SPL (1 mW)
靈敏度	10-20,000 Hz
頻率響應	200 mW
最大輸出功率	68 Ω (銅包鋁線)
額定阻抗	耳罩
耳罩	人造皮
線材	1米及3米直線
接頭	鍍金立體3.5 mm接頭
夾力	約 4.5 牛頓
淨重(不含線)	190 g (6.7 oz)
隨貨附件	便攜袋
	1米及3米直線
	3.5 mm to 6.3 mm 鍍金立體轉接頭
	線扣
選購配件	EPK604 耳罩套件(一對耳罩)
	FD3YW/S 3米長卷線
	HA3D 高品質耳機放大器

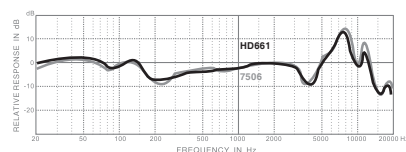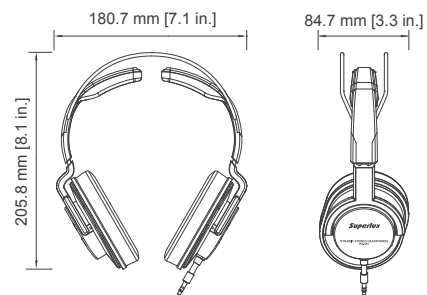

HD661與MDR-7506有相近的頻率響應。HD661的大動態範圍及高解析的特色，能真實而清晰地重現聲音的細節，是最佳的專業監聽等級應用的耳機。